

NPort IAW5000A-6I/O Series

1/2-port RS-232/422/485 IEEE 802.11a/b/g/n wireless device server with 4 DIs and 2 DOs



- > Link any serial or Ethernet device to an IEEE 802.11a/b/g/n network
- > Redundant dual DC power inputs and relay output supported
- > Secure data access with WEP/WPA/WPA2
- > MicroSD for configuration backup
- > Wireless Client function for flexible integration
- > 4 kV serial surge protection
- > Serial device server with 4 DIs and 2 DOs



Overview


The NPort IAW5150A-6I/O and NPort IAW5250A-6I/O series, which are wireless serial device servers with digital I/Os, provide maximum flexibility when you need to integrate serial equipment in the field with a wireless Ethernet network. The combination of digital I/Os makes the device servers well-suited for a variety of industrial data acquisition applications. The DI/Os on the device can be controlled over TCP/IP using the Modbus TCP protocol and can be configured and secured

from a web browser. The device can also be installed as a COM Port (patented Real COM) on a Windows/Linux PC to make it compatible with legacy applications.

All models are ruggedly constructed, DIN-rail mountable, and designed with redundant power inputs to ensure uninterrupted operation for industrial applications.

Wireless Client

The device servers are equipped with one Ethernet port that allows data to be transferred seamlessly between the serial line, LAN, and WAN, allowing the LAN and WLAN interfaces to be bridged together using a single IP address.

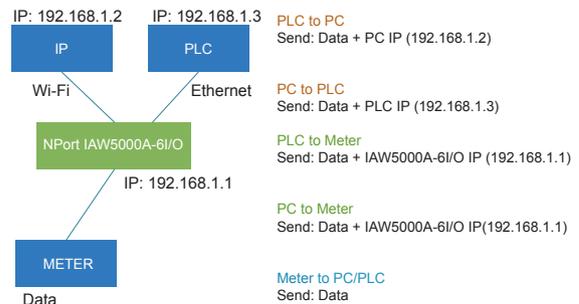

Secure Remote Management and Configuration with SSH/HTTPS

Unauthorized access is one of the biggest headaches for system managers. In addition to IP filtering and password protection, the NPort IAW5150A-6I/O and NPort IAW5250A-6I/O also support SSH and HTTPS to provide protection from hackers. To transmit control

messages securely, open the web console using a web browser that supports HTTPS (Internet Explorer, for example). You may also open the serial or Telnet console, such as PuTTY, using a terminal emulator that supports SSH.

Select "Any Baudrate" between 50 bps and 921.6 kbps

Most device servers only support a fixed number of serial baudrates. However, some applications require special baudrates, such as 250 kbps or 500 kbps. With the NPort IAW5150A-6I/O and NPort

IAW5250A-6I/O, you can use any baudrate between 50 and 921.6 kbps. If your device's baudrate is not a standard baudrate, select "other" from the drop-down list and then enter the baudrate.

Specifications

Ethernet Interface

Number of Ports: 1

Speed: 10/100 Mbps, auto MDI/MDIX

Connector: RJ45

Magnetic Isolation Protection: 1.5 kV built-in

WLAN Interface

Standards Compliance: 802.11a/b/g/n

Network Modes: Infrastructure, Ad-Hoc

TX Transmit Power:

802.11b:

Typ. 16 dBm \pm 1.5 dBm @ 1 Mbps,

Typ. 16 dBm \pm 1.5 dBm @ 11 Mbps

802.11a:

Typ. 15 dBm \pm 1.5 dBm @ 6 Mbps,

Typ. 14 dBm \pm 1.5 dBm @ 54 Mbps

802.11g:

Typ. 16 dBm \pm 1.5 dBm @ 6 Mbps,

Typ. 14 dBm \pm 1.5 dBm @ 54 Mbps

802.11n 2.4 GHz

Typ. 16 dBm \pm 1.5 dBm @ 6.5 Mbps,

Typ. 12 dBm \pm 1.5 dBm @ 72.2 Mbps

802.11n 5 GHz

Typ. 15 dBm \pm 1.5 dBm @ 6.5 Mbps,

Typ. 12 dBm \pm 1.5 dBm @ 150 Mbps

RX Sensitivity:

802.11b:

-92 dBm @ 1 Mbps, -84 dBm @ 11 Mbps

802.11a:

-91 dBm @ 6 Mbps, -74 dBm @ 54 Mbps

802.11g:

-91 dBm @ 6 Mbps, -73 dBm @ 54 Mbps

802.11n 2.4 GHz

-89 dBm @ 6.5 Mbps (20 MHz), -71 dBm @ 72.2 Mbps (20 MHz)

802.11n 5 GHz

-89 dBm @ 6.5 Mbps (20 MHz), -71 dBm @ 72.2 Mbps (20 MHz)

-85 dBm @ 13.5 Mbps (40 MHz), -67 dBm @ 150 Mbps (40 MHz)

Radio Frequency Type: DSSS/OFDM

Transmission Rate:

802.11a: 54 Mbps

802.11b: 11 Mbps

802.11g: 6 to 54 Mbps

802.11n: 6.5 to 150 Mbps

Transmission Distance: Up to 100 meters (in open areas)

Wireless Security:

- WEP: 64-bit/128-bit data encryption

- WPA, WPA2, 802.11i: Enterprise mode and Pre-Share Key (PSK) mode

- Encryption: 128-bit TKIP/AES-CCMP EAP-TLS, PEAP/GTC, PEAPMD5, PEAP/MSCHAPV2, EAP-TTLS/PAP, EAP-TTLS/CHAP, EAP-TTLS/MSCHAP, EAP-TTLS/MSCHAPV2, EAP-TTLS/EAP-MSCHAPV2, EAP-TTLS/EAP-GTC, EAP-TTLS/EAP-MD5, LEAP

Antenna Connector: Reverse SMA

Serial Interface

Number of Ports:

NPort IAW5150A-6I/O: 1

NPort IAW5250A-6I/O: 2

Serial Standards: RS-232/422/485 (DB9 male connector)

Serial Line Surge Protection: 4 kV (level 4)

Off-line Port Buffering:

NPort IAW5150A-6I/O: 20 MB

NPort IAW5250A-6I/O: 10 MB

Serial Communication Parameters

Data Bits: 5, 6, 7, 8

Stop Bits: 1, 1.5, 2

Parity: None, Even, Odd, Space, Mark

Flow Control: RTS/CTS and XON/XOFF

Baudrate: 50 bps to 921.6 kbps

Serial Data Log: 64 KB

Serial Signals

RS-232: TxD, RxD, RTS, CTS, DTR, DSR, DCD, GND

RS-422: Tx+, Tx-, Rx+, Rx-, GND

RS-485-4w: Tx+, Tx-, Rx+, Rx-, GND

RS-485-2w: Data+, Data-, GND

Digital Input/Output

Digital Inputs: 4 channels

Digital Outputs: 2 channels

Isolation: 3k VDC or 2k Vrms

Digital Input

Sensor Type: Wet Contact (NPN or PNP), Dry Contact

I/O Mode: DI or Event Counter

Dry Contact:

- On: short to GND

- Off: open

Wet Contact (DI to COM):

- On: 10 to 30 VDC

- Off: 0 to 3 VDC

Counter Frequency: 20 Hz

Digital Filtering Time Interval: Software Configurable

Digital Output

Type: Sink

I/O Mode: DO or Pulse Output

Over-Voltage Protection: 45 VDC

Over-Current Protection: 2.6 A

Over-Temperature Shutdown: 175°C (typical), 150°C (min.)

Current Rating: 200 mA per channel

Storage Card Slot: 1 microSD (SDHC) card slot; supports up to 32 GB

Software

Network Protocols: ICMP, IPv4, TCP, UDP, DHCP, Telnet, DNS, SNMP V1/V2c/V3, HTTP, SMTP, SNTIP, SSH, HTTPS, Modbus TCP (for I/O communication)

Configuration Options: Web Console, Serial Console, Telnet Console, Windows Utility

Secure Configuration Options: HTTPS, SSH

Windows Real COM Drivers: Windows 95/98/ME/NT/2000, Windows XP/2003/Vista/2008/7/8/8.1/10 (x86/x64), Windows 2008

R2/2012/2012 R2 (x64), Windows Embedded CE 5.0/6.0, Windows XP Embedded

Fixed TTY Drivers: SCO Unix, SCO OpenServer, UnixWare 7, QNX 4.25, QNX 6, Solaris 10, FreeBSD, AIX 5.x, HP-UX 11i, Mac OS X

Linux Real TTY Drivers: Linux 2.4.x, 2.6.x, 3.x

Utilities: Device Search Utility and NPort Windows Driver manager

Management: SNMP MIB-II

Physical Characteristics

Housing: Aluminum sheet metal

Weight:

NPort IAW5150A-6I/O:

without the box: 739.50 g (1.63 lb)

with the box: 936.40 g (2.06 lb)

NPort IAW5250A-6I/O:

without the box: 756.50 g (1.67 lb)

with the box: 953.45 g (2.10 lb)

Dimensions: 59.6 x 101.7 x 134 mm (2.35 x 4 x 5.28 in)

Antenna Length: 109.79 mm (4.32 in)

Environmental Limits

Operating Temperature:

Standard Models: 0 to 60°C (32 to 131°F)

Storage Temperature: -40 to 75°C (-4 to 167°F)

Ambient Relative Humidity: 5 to 95% (non-condensing)

Power Requirements

Input Voltage: 12 to 48 VDC

Power Consumption:

NPort IAW5150A-6I/O: 300 mA @ 12 V

NPort IAW5250A-6I/O: 300 mA @ 12 V

Connector: Terminal block

Standards and Certifications

Safety: UL 60950-1, EN 60950-1

EMC: EN 61000-6-2/6-4

EMI: CISPR 22, FCC Part 15B Class A

EMS:

IEC 61000-4-2 ESD: Contact: 4 kV; Air: 8 kV

IEC 61000-4-3 RS: 80 MHz to 1 GHz: 10 V/m

IEC 61000-4-4 EFT: Power: 2 kV; Signal: 1 kV

IEC 61000-4-5 Surge: Power 1 kV; Signal: Ethernet (2 kV), Serial (4 kV)

IEC 61000-4-6 CS: 10 V

IEC 61000-4-8

Radio: CE (ETSI EN 301 893, ETSI EN 300 328), ARIB RCR STD-33, ARIB STD-66

Reliability

Alert Tool: RTC (real-time clock)

Automatic Reboot Trigger: Built-in WDT (watchdog timer)

MTBF (mean time between failures)

Time:

NPort IAW5150A-6I/O: 282,087 hrs

NPort IAW5250A-6I/O: 237,037 hrs


Standard: Telcordia (Bellcore) Standard TR/SR

Warranty

Warranty Period: 5 years

Details: See www.moxa.com/warranty

Dimensions (NPort IAW5000A-6I/O)

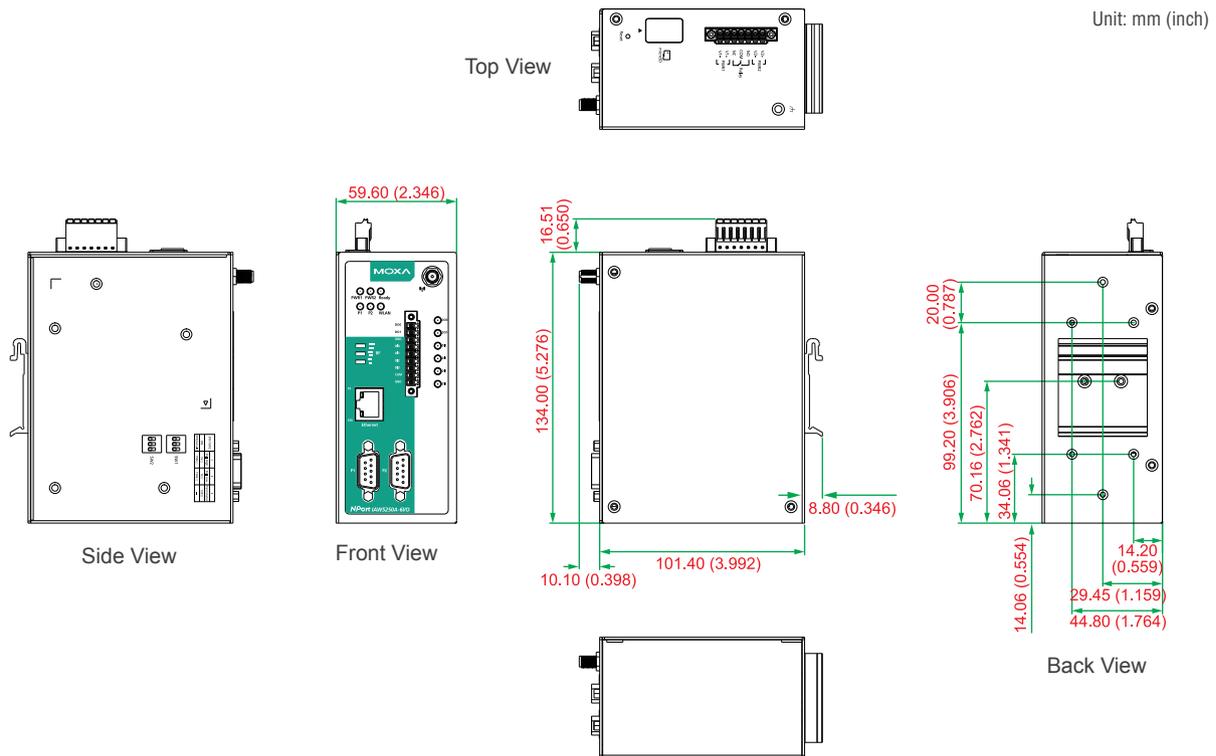

: Ordering Information

Available Models

NPort IAW5150A-6I/O: 1-port RS-232/422/485 IEEE 802.11a/b/g/n wireless device server with 4DIs and 2DOs, 0 to 60°C operating temperature

NPort IAW5250A-6I/O: 2-port RS-232/422/485 IEEE 802.11a/b/g/n wireless device server with 4DIs and 2DOs, 0 to 60°C operating temperature

Optional Accessories (can be purchased separately)

Mini DB9F-to-TB: DB9 female to terminal block connector

WK-51-01: Wall-mounting kit

DR-4524: 45W/2A DIN-rail 24 VDC power supply with universal 85 to 264 VAC input

DR-75-24: 75W/3.2A DIN-rail 24 VDC power supply with universal 85 to 264 VAC input

DR-120-24: 120W/5A DIN-rail 24 VDC power supply with 88 to 132 VAC or 176 to 264 VAC input, selected by a DIP switch

Package Checklist

- 1 NPort IAW5150A-6I/O or 1 NPort IAW5250A-6I/O
- 1 antenna
- Documentation and software CD
- Quick installation guide (printed)
- Warranty card